


# Quick - Tile

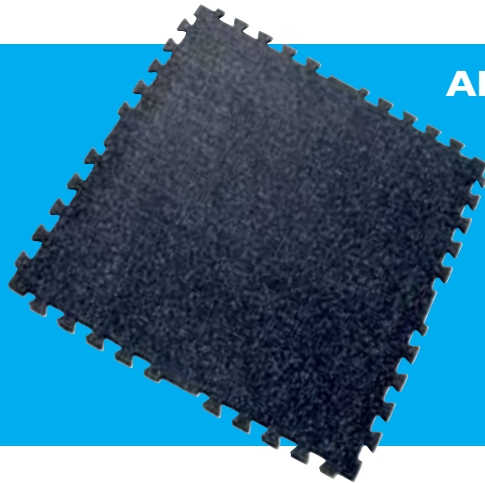

**Allied Products** is pleased to offer “**Quick-Tile**”, an extremely durable, inter-locking, recycled rubber tile. **Quick-Tile** meets our strict requirements for performance, durability, appearance and ease of installation. The unique tab design holds the tiles together securely without the need of expensive adhesives, tapes or the labor to apply them.

**Allied’s Quick-Tile** is the answer to your special purpose and fitness flooring needs. The non-slip surface is easy to clean and maintain, and will provide trouble free use for many years to come. **Allied Quick-Tile** is manufactured in the USA from recycled scrap tires and backed by a two year factory warranty.

Installation is as easy as aligning the tabs and pressing together with your fingers or using a rubber mallet. The unique tab design allows for a square or brick installation pattern. **Allied Quick-Tile** can also be disassembled and re-assembled time and again without damaging the tiles.




1.5"

Custom Colors Available



## Standard Colors

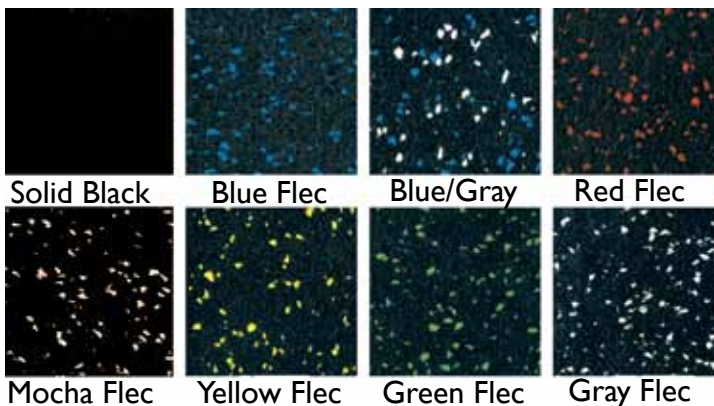

- Aesthetically Pleasing. **Quick-Tile** is available in standard colors as shown above or in a variety of custom colors.
- Factory Cut Edges: to assure a uniform and simple installation. Almost invisible seams!
- Safe for Indoor and Outdoor Use

- Practically seamless look!
- Provides Excellent Traction-even when wet!
- Manufactured in the USA.
- Manufactured with Premium Recycled Rubber.
- Easily Cleaned: Indoor cleaning involves a broom, damp sponge, mop or vacuum cleaner. For outdoor uses, a water hose, leaf blower or broom is sufficient.

Allied Products, LLC

**1-800-864-1272**

[www.alliedproductsllc.com](http://www.alliedproductsllc.com)

Earth -  - Friendly

# Quick - Tile

## TYPICAL PROPERTIES

**Colors:** 8 standard colors and a variety of custom colors.

**Material:** SBR bonded granular black recycled rubber with or without EPDM

**Dimensions:** Thickness 3/8" (9.5mm), or 5/16" (8mm) +/- .005

**Size:** 28.5" x 28.5"

**Density:** ASTM D-3676 60lb/ft<sup>3</sup>/980 kg/m<sup>3</sup>

**Shearing Strength:** < .06 (N/mm<sup>2</sup>)

**Tensile Strength:** < 1.80 (N/mm<sup>2</sup>)

**Compression & Recovery:** After 48hrs.: 99.4% After 72 hrs.: 99.7%  
After 96 hrs.: 99.7%

## INSTALLATION

**Quick-Tile** is simple to install and can be installed over nearly any smooth surface including concrete, asphalt, wood or tile. No adhesive, double-sided tape or special tools are required and QuickTile can be disassembled and reassembled over and over again without damaging the tiles. Simply align the tabs and press into place by hand or with a short piece of wood and a mallet. Trim the outer edge pieces with a sharp utility knife and you are done!

## OTHER PRODUCTS

**Allied Products** offers many other flooring and sports surfacing solutions for fitness centers, recreation centers, children's play areas and home gyms. We also supply and install materials for constructing racquetball and squash courts as well as high impact gym walls.

For expert assistance please call us at **1-800-864-1272**  
or visit our website at **www.alliedproductsllc.com**